## **TX301 Series Transfer Switch**

#### 600 Amps

Service Entrance Rated ·Contactor Type ·Open and Delayed Transition

- Automatic Transfer Switch
- 600A up to 600V VAC, 60 Hz, 100% current rated
- Single or Three Phase
- 2, 3, or 4 Poles
- NEMA 1 or 3R
- Open and Inphase or Open with Delayed Transition
- ETL Listed to UL 1008
- High Withstand and Closing Ratings



GENERAC

INDUSTRIAL

Image used for illustration purposes only

## **Codes and Standards**

Not all codes and standards apply to all configurations. Contact factory for details.



cETL Listed

**\*** 

NFPA 70, 99, 110



NEC 700, 701, 702, 708

## Description

Generac's patented\* contactor type transfer switches are doublethrow robust switch construction with inherent interlocks for safe positive transfer between power sources. The contacts are silver composite for long life, resisting pitting or burning. The switches are rated for full load transfers in mission critical, emergency, legally required, and optional power systems.

The microprocessor based controller provides the customers with the flexibility to program a comprehensive group of set points to match the application needs. The controller has two programmable inputs and one programmable output as standard and is available with an optional expansion board for up to four programmable inputs and outputs. The LCD displays real time and historical information with time-stamped events. The integrated plant exerciser can be configured in off, daily, day of week, biweekly, and monthly intervals with user selectable run time. Standard features of the controller include three phase sensing on both sources, phase unbalance, phase reversal, load shed, emergency inhibit, and communications.

# **TX301 Series Transfer Switch**

600 Amps

Service Entrance Rated ·Contactor Type ·Open and Delayed Transition

## **STANDARD FEATURES**

#### GENERAL

- Small Footprint, Results in Easy Mounting and Installation for Reduced Time and Costs
- Floor Mounted, Wall Secured
- Cable Entry is Top or Bottom
- Double-Throw, Stored Energy Transfer Mechanism
- Can be Electrically Isolated while Energized
- Graphical LCD-Based Display for Programming, System Diagnostics and Help Menu Display Mimic.
- Diagram with Source Available and Connected
- Method of Transfer: Open with Inphase Transition
- Mechanically Interlocked to Prevent Connection of Both Sources
- Modbus<sup>®</sup> RTU
- TXC 100 Controller
- Operating Temperature -4 ° to 158 °F (-20 ° to 70 °C)
- Removable Top and Bottom Plates for Ease of Entry
- Voltage Agnostic\*
- · High Withstand and Closing Ratings
- Heater Kit Standard on All 3R Enclosures
- Auxiliary Input Includes: Permissive Inputs (24VDC)
- General Alarm Indication

**AVAILABLE OPTIONS** 

• 2 Year Standard Warranty

- **VOLTAGE AND FREQUENCY SENSING**
- Three Phase Under and Over Voltage Sensing on Normal and Emergency Sources
- Under and Over Frequency Sensing on Normal and Emergency
- Selectable Settings: Single or Three Phase Voltage
- Sensing on Normal and Emergency 60 Hz
- Phase Sequence Sensing for Phase Sensitive Loads

#### **START CIRCUIT**

- 2-wire Start
- 3-wire Start from C Contact for Circuit Monitoring

#### **DIGITAL OUTPUTS**

- Switch Position Indication (2 Form C)
- Signal Before Transfer (Elevator)
- General Alarm

#### **DIGITAL INPUTS**

- · Emergency Inhibit (Permissive & Load Shed)
- Go to Emergency
- Manual Generator Retransfer

### CONTROLS

- Front Programmable Control Reduces PPE Needs
  and Arc Flash Hazard
- Built in Battery Backup Increases Switch Reliability and Reduces Switch Transition Time to Alternate Source
- Battery Backup Able to Power the Controller for up to 60 Minutes in the Event of No Source Availability
- · Generator Battery Backup for Controller
- Accessible USB Port for Easy Data Downloads, Firmware Updates without Requiring PPE, Reducing the Risk of Arc Flash
- · All Amp Nodes Offered with Delayed Transition
- Heater Programmable through Control for Desired Temperature and Humidity Settings
- Front Accessible Customer Connections
- Time-Stamped Event History Log
- Programmable Exerciser Daily, Weekly, Biweekly, Monthly
- \* 480 V 3-Wire Systems and all 600 V systems must be specified at time of ordering for Transformer Kit to be included

- Time Delay in Neutral Transition (TDN) or Inphase with a Default to Time Delay in Neutral Transfer
- Remote Annunciator
- 3R Padlockable Cover for Controller (Standard on 3R Enclosure)
- CTs for Integrated Metering
- Heater Option for Temperature and Humidity Control (Standard on 3R Enclosure)
- Expandable Input/Output Board Module Includes: 4 Relay Outputs and 4 Optically Isolated Inputs
- 2 Year Extended Limited Warranty
- 5 Year Basic Limited Warranty
- 5 Year Extended Limited Warranty
- 7 Year Extended Limited Warranty
- 10 Year Extended Limited Warranty

#### **ENGINEERED OPTIONS**

- Transient Voltage Surge Suppressor (TVSS)
  - Manual Generator Retransfer Switch
- Go to Emergency Switch

٠

### **CONVERSION KITS**

- 480 V Transformer Kit for 3-Wire Systems
- 600 V Transformer Kit

#### 2 of 3




# **TX301 Series Transfer Switch**

600 Amps

Service Entrance Rated ·Contactor Type ·Open and Delayed Transition

### **UNIT DIMENSIONS\***

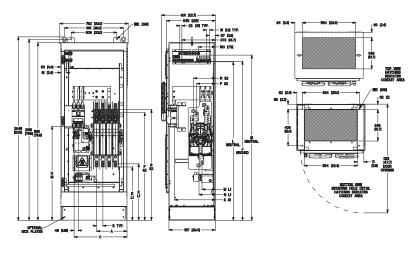

	Description	600A 2 & 3 Pole	600A 4 Pole
in (mm)	A (Dim)	13.3 (339)	13.3 (339)
	B (Dim)	2.7 (70)	2.7 (70)
	C (Dim)	23.2 (590)	23.2 (590)
	D (Dim)	23.4 (594)	23.4 (594)
	E (Dim)	24.8 (629)	24.8 (629)
	F (Dim)	47.2 (1199)	47.2 (1199)
	G (Dim)	48.6 (1234)	48.6 (1234)
	H (Dim)	41.3 (1048)	41.3 (1048)
	J (Dim)	69.7 (1771)	69.7 (1771)
	K (Dim)	69.5 (1766)	69.5 (1766)
	L (Dim)	72.5 (1841)	72.5 (1841)
	M (Dim)	5.8 (148)	5.8 (148)
	N (Dim)	7.2 (182)	7.2 (182)
	P (Dim)	8.2 (208)	8.2 (208)
	R (Dim)	9.5 (242)	9.5 (242)
	S (Dim)	17.9 (455)	17.9 (455)
Cu/Al	Normal 75 °C Wire	(2) 600 - 2/0	(2) 600 - 2/0
	Normal Wire Lug Torque Ib/in (Nm)	450 (50.8)	450 (50.8)
	Standby/Load Source 75 °C Wire	(2) 750 - 2	(2) 750 - 2
	Standby/Load Wire Lug Torque Ib/in (Nm)	620 (50.8)	620 (70)
	Neutral Connection	(8) 600 - 4 or (16) 250 - 1/0	(8) 600 - 4 or (16) 250 - 1/0
	Neutral Wire Lug Torque Ib/in (Nm)	375 (31.1)	375 (31.1)
	Ground Connection	(10) 350 - 6	(10) 350 - 6
	Ground Wire Lug Torgue ib/in (Nm)	275 (31.1)	275 (31.1)
lbs (kg)	Weight	2–Pole: 445 (201.8) 3–Pole: 465 (210.9)	485 (220)

UL 1008 Withstand and Closing Ratings				
Ampere Rating	Service Entrance (kA)	Voltage (V)		
600	100	Up to 480		
600	35	Up to 600		

\* All measurements are approximate and for estimation purposes only. Specification characteristics may change without notice. Please contact a Generac Power Systems Industrial Dealer for detailed installation drawings.

3 of 3

