

## GP7500E DF

## GP SERIES Portable Generator

Model 8011-0 UPC: 696471099409  
(50-State)

### Features


- **Dual Fuel** – Runs on gasoline or Liquid Propane Fuel.
- **COsense® Technology** – STOPS, ALERTS, SAVES. Powerful protection against hazardous carbon monoxide.
- **Electric Start** provides reliable, hassle free startups (battery included).
- **PowerRush® Advanced Technology** delivers over 30% more starting capacity allowing you to do more with less.\*
- **Generac's OHV engine** with splash lube on 420cc engine provides a long engine life.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- **Large-capacity steel fuel tank** with incorporated fuel gauge provides durability and up to an 10 hour run-time at 50% load on gasoline and 5 hour run-time at 50% load on LP using a 20 lb tank.
- **Propane compatibility** allows the unit to run on a 20 lb LP tank (not included).
- **Fuel source selector** allows the unit to switch seamlessly between fuel types to prevent unit shutdown.
- **Hour Meter** tracks maintenance intervals.
- **Heavy-duty, never-flat wheels** allow for easy portability.
- **Fold-down locking handle** for sturdy portability and compact storage.
- **HomeLink®** manual transfer switch compatible for safe home backup power.

\*Increases electrical current upon demand; above rated output when starting electric motors.



**AC Rated Output Running Watts 7500 (Gas) / 6800 (LP)**  
**AC Maximum Output Starting Watts 9400 (Gas) / 8500 (LP)**

### Control Panel

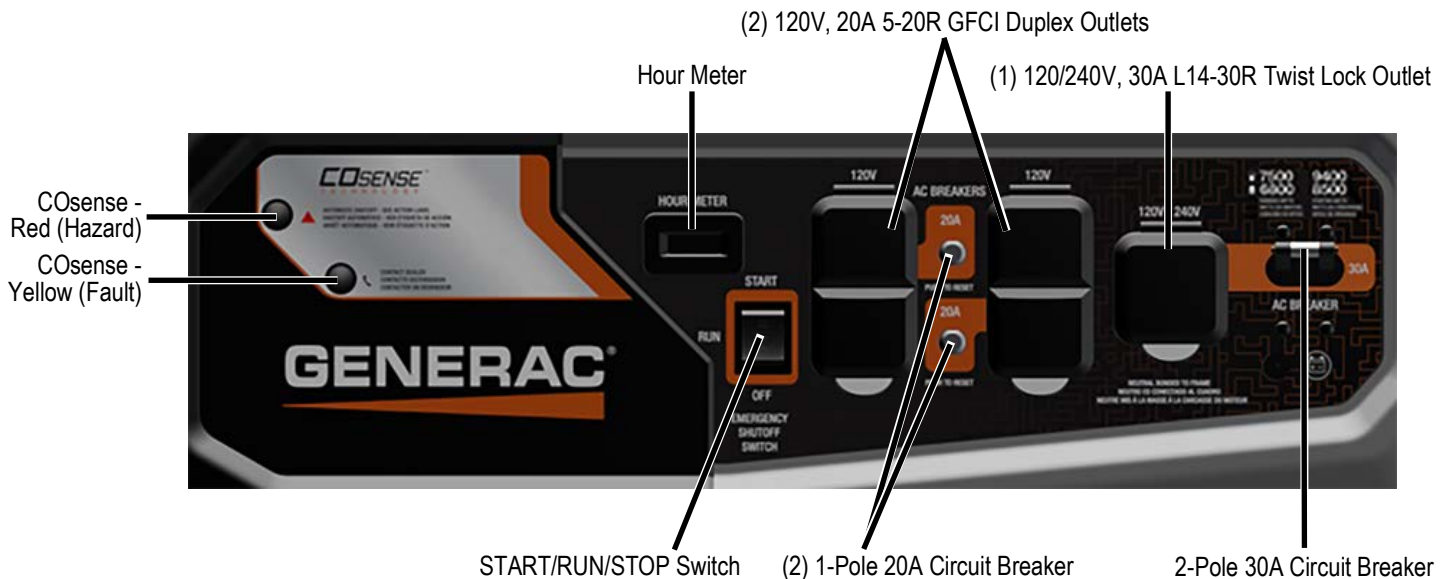

## GP7500E DF

### Specifications

Product Series	GP7500E DF
Model Number	8011-0
Configuration	8011 (50 ST)
AC Rated Output Running Watts	7500 (Gas) / 6800 (LP)
AC Maximum Output Starting Watts	9400 (Gas) / 8500 (LP)
Rated AC Voltage	120/240 VAC
Rated AC Frequency	60 Hz
Rated 120/240 VAC Amperage	62.5 / 31.25
Engine Displacement	420cc
Engine Type	OHV
Engine RPM	3600
Recommended Oil	10W-30 / SAE 30
Oil Capacity qt (L)	1.06 (1.0)
Lubrication Method	Splash Lube
Automatic Voltage Regulation (AVR)	Yes
Choke Location	On Engine
Fuel Shut Off	On Fuel Tank
Starting Method	Electric Start / Pull Start
Low Oil Level Shutdown	Yes

Neutral Bonded to Ground	Yes
Start Switch Type	START/RUN/STOP Switch
Start Switch Location	On Control Panel
Fuel Gauge	Yes
Fuel Tank Capacity gal (L)	7.9 (29.9)
Run Time at 50% of Rated Load (Hours)	10 (Gas) / 5 (LP)*
Handle Style	Dual Grip, Single Folding with Lock Pin
Wheel Type	9.5" Never Flat
Warranty- Residential	3 Year Limited
Warranty- Commercial	2 Year Limited
Included	Engine oil, oil funnel, handle and wheel kit, owner's manual, charging cable, LP hose, and primary regulator to connect to 20 lb LP tank

\* When using a 20 lb. LP tank

### Dimensions and Weights

Length in (mm)	27.18 (690.3)
Width in (mm)	27 (684)
Ext. Length in (mm)	45.44 (1154.2)
Height in (mm)	27.09 (688)
Carton Length in (mm)	33.46 (850)
Carton Width in (mm)	22.44 (570)
Carton Height in (mm)	26.38 (670)
Unit Weight lbs (kg)	204 (92.5)
Shipping Weight	229 (103.8)

